



Paving Intelligence into Safety, Security & Mobility

All-in-one License Plate Recognition camera

Highways - Bridges - Tunnels - Toll Roads

CT-LPR2 is a compact License Plate Recognition camera designed for applications on highways, toll roads, urban roads environments. It reads license plates in real time and can be used for short to medium distances.


This embedded **License Plate Recognition camera** can be used for a variety of applications from traffic statistics on highway and even free flow tolling applications, speed and safety distance calculation.

The sensor internal image processing unit is running at 60 frames per second and is coupled with an embedded infra-red illumination module (850 nm). This allows for best performances in any weather or external lighting conditions.

The **CT-LPR2** camera can detect license plates at a distance up to 40 meters and covers a width of about 7 meters corresponding to two lanes or one lane and both adjacent interlanes of traffic. It is also fully integrated with the Citilog suite of server and back office workstation operating software to provide real time license plate acquisition and the required centralized monitoring tools for an end to end operating system.



- ✓ **Recognition distance :**
Up to 40 meters
- ✓ **Coverage width :**
Up to 7 metres
- ✓ **Image analysis :**
60 images/second
- ✓ **Illumination :**
IR 850nm pulsed
- ✓ **Lens:**
20x motorized zoom
Color - B&W

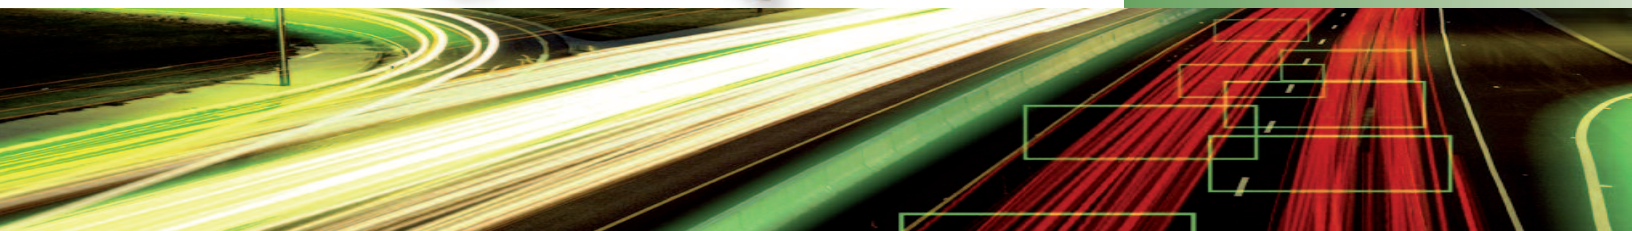

SPECIFICATIONS


Electronic characteristics	Communication bus	Ethernet 100Mbit/s TCP-IP IPv4, RS232
	Power supply - Consumption	24V - 40W average
	Homologation/Certification	EMC EN 55022, EN 61000, photobiological safety IEC62471, environmental TR2130C
	MTBF	56,000 hours minimum
Mechanical characteristics	Connectors	Waterproof push-pull IP67
	Temperature	From -20° to +55°C on "start-up" and from -40° to +55°C when "in use"
	Casing	RAL 7048 highly resistant IP67 stainless steel
	Dimensions (mm) - Weight	226 (L) x 148 (P) x 141 (H) - 4 kg
Options	Colour optical head	
	White light illumination	
	Pan-tilt engine	
	Pole mount adaptor	
	Fixation bracket	

CT-LPR2



USER FRIENDLY INTERFACE

MediaManager, the newly developed Citilog GUI, provides supervision, administration and back office functionalities through a user friendly interface. Along with all other Citilog products, the **CT-LPR2** can be integrated into **MediaManager**.

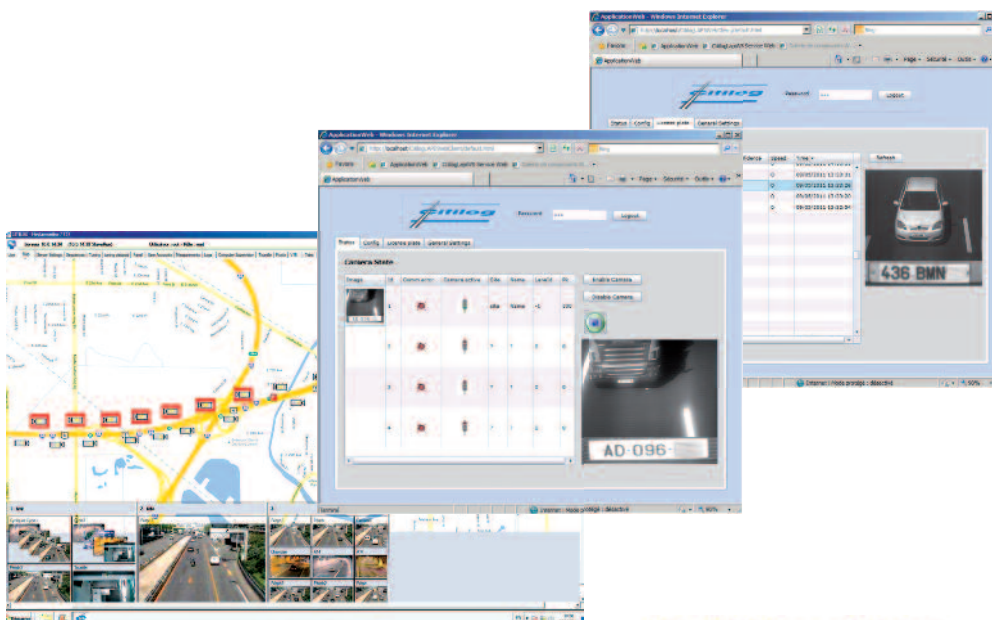

Traffic Supervision Video Management

Licence Plate and Video Streaming



Server



Tolling



Roadways



Tunnels



Europe Citilog SA

19/21, rue du 8 mai 1945
94110 Arcueil - France
Tel: +33 1 41 24 34 54
Fax: +33 1 41 24 34 99

citilog@citilog.com

North America Citilog Inc.

2 Bala Plaza, Suite 300
Bala Cynwyd, PA 19004 - USA
Tel: +1 (215) 609 49 45
Fax: +1 (484) 873 22 92

citilogusa@citilog.com

IberoAmerica Citilog IberoAmerica

Av. Jacarandas, 2 Oficina 110
46100 Burjassot, Valencia - Spain
Tel: +34 961 363 971
Fax: +33 1 41 24 34 99

espana@citilog.com

Asia-Pacific Citilog APA

21/F The Phoenix, 23 Luard Road
Wanchai - Hong Kong
Tel: +852 2593 1500
Fax: +852 2593 1222

citilogapa@citilog.com